



PUR-O-ZONE™

Environmental Cleaning Solutions



Copyright © 2010, PUR-O-ZONE, Inc. All rights reserved.

Manual Floor Stripping & Finishing

PREPARATION/CLEANING

- Bond-Ayd Neutralizer
- Jet Blast Off Floor Detergent
- Quickso Floor Detergent
- Destroyer II Degreaser
- RX-2050 Degreaser
- Aqua-Clean Wood Floor Cleaner
- RX-4040 Heavy Duty Floor Cleaner
- Sparkall Neutral Cleaner
- Tackrag Waterless Cleaner
- Quick-Prep Cleaner-Restorer

STRIPPING

- Magnum Non-ammoniated Stripper

FINISHING

- Success Floor Finish
 - 20% solids
 - High Gloss
 - Super Protection
- Aqua-Tuff
 - Water-Based
 - Wood Floor Finish
- Tourney-Tuff
 - Premium Gym Floor Finish

Basic Steps*

STRIPPING

- Dilute **Magnum** Non-Ammoniated Stripper 1:2 (one part **Magnum**, 2 parts water) for heavy floor finish removal. Use cold water.
- Dilute **Magnum** 1:4 to 1:8 for normal floor finish removal. Use cold water.
- Apply the solution with mop or applicator.
- Use solution liberally, never allow to dry during stripping process.
- Agitate solution with mop or floor machine.

Basic Steps*

STRIPPING (CONTINUED)

- After working time has elapsed, pick up solution with wet vacuum or auto-scrubber. You may also recover the mixture with a mop, bucket and wringer. With the mop method, rinse *at least* twice with clear water and change whenever it becomes noticeably grey.

NEUTRALIZING

- Mix **Bond-Ayd** at 1:64, or one part Bond-Ayd, 64 parts water. (2 oz. product per gallon of water.)
- Flood the floor with the neutralizing mixture. Spread evenly with a clean mop. Contain the mixture from running into unintended areas. Recover thoroughly with wet vacuum.
- A wet mop may also be used for recovery. With this method, change the rinse solution whenever water becomes grey.

Basic Steps*

SUCCESS Floor Finish


- Water Clear Polymers
- High Solids
- High Gloss
- Scuff Resistant



FINISHING

- Use one gallon of **Success** to coat about 2,000 sq. ft. of floor. (Select **Aqua-Tuff** for wood floors or **Tourny-Tuff** for gym floors and consult directions on container.)
- With a clean finishing mop, apply thin coats of **Success** floor finish. Four thin coats provide the best results.
- Allow each coat to dry for 30 minutes. Increase drying time for high humidity or low floor temperatures. Dry until not tacky. Test in an inconspicuous area by sliding a sheet of paper across the finish. If it slides easily, that area is dry. Test more areas to be certain.
- Apply no more than four coats in 24 hours. A minimum of three thin coats is recommended.

*YOUR CIRCUMSTANCES MAY VARY. CALL FOR A FREE ON-SITE REVIEW FROM YOUR REPRESENTATIVE.

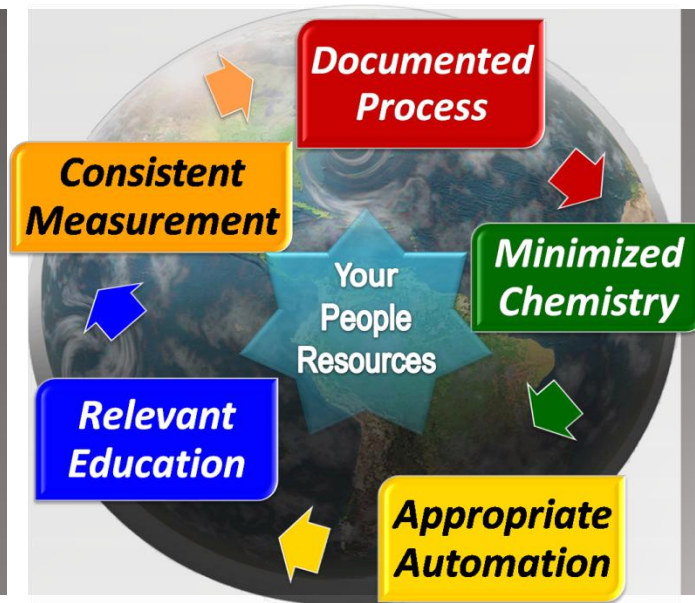

www.purozone.com